

QUICK START

1) Add Water

- Remove grey cap and fill both reservoir tanks with tap water
- Each tank holds 1/2 gallon



2) Plug into Electrical Outlet

- The EAGLE PLUS™ should be the only appliance plugged into the electrical outlet



- USE only a Heavy Duty extension cord
- 10 or 12 Gauge
 - 15 AMP / 125V
 - 25-50 FT in length

3) Power



ON



ON/OFF

Master Power Switch

It will take 10 minutes to reach working temperature

3) Connect the Hose

- Secure by pushing by locking the front brakes
- locking the wheels will make it easier to push the hose into the steamer



4) Insert the hose

- Push until you hear a “click”




5) Steam Control

- Unlock by pressing RED button on hose handle
- Squeeze trigger




6) Adjust Steam Pressure

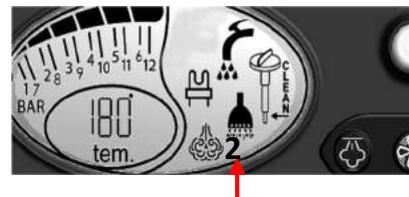

- ADJUST STEAM PRESSURE
PUSH  BUTTON
- 1 – Low
- 2 – **Medium (Recommended)**
- 3- High

EXTRACTION & VACUUM

Hot Water Injection / Extraction

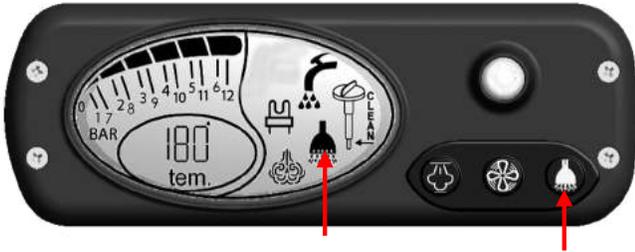

The Extraction function injects water or a detergent into the steam using the extraction nozzles and floor brush


Activate by pushing and holding the  button on the hose handle, until the light turns on



Increase / Decrease water injection by pushing and holding the  button on the console.

Settings: Hi / Med / Low

Vacuum

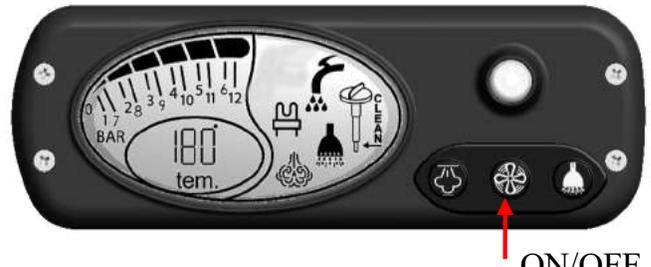

ON/OFF

Activate the *VACUUM*:

- Push the  button on the console OR
- Pushing the  button on the hose handle



Increase / Decrease suction by holding the  button on the console

GREEN - LOW

ORANGE - MEDIUM

RED - HIGH

Warning:

To use the vacuum to soak up water, remove the filter.

